




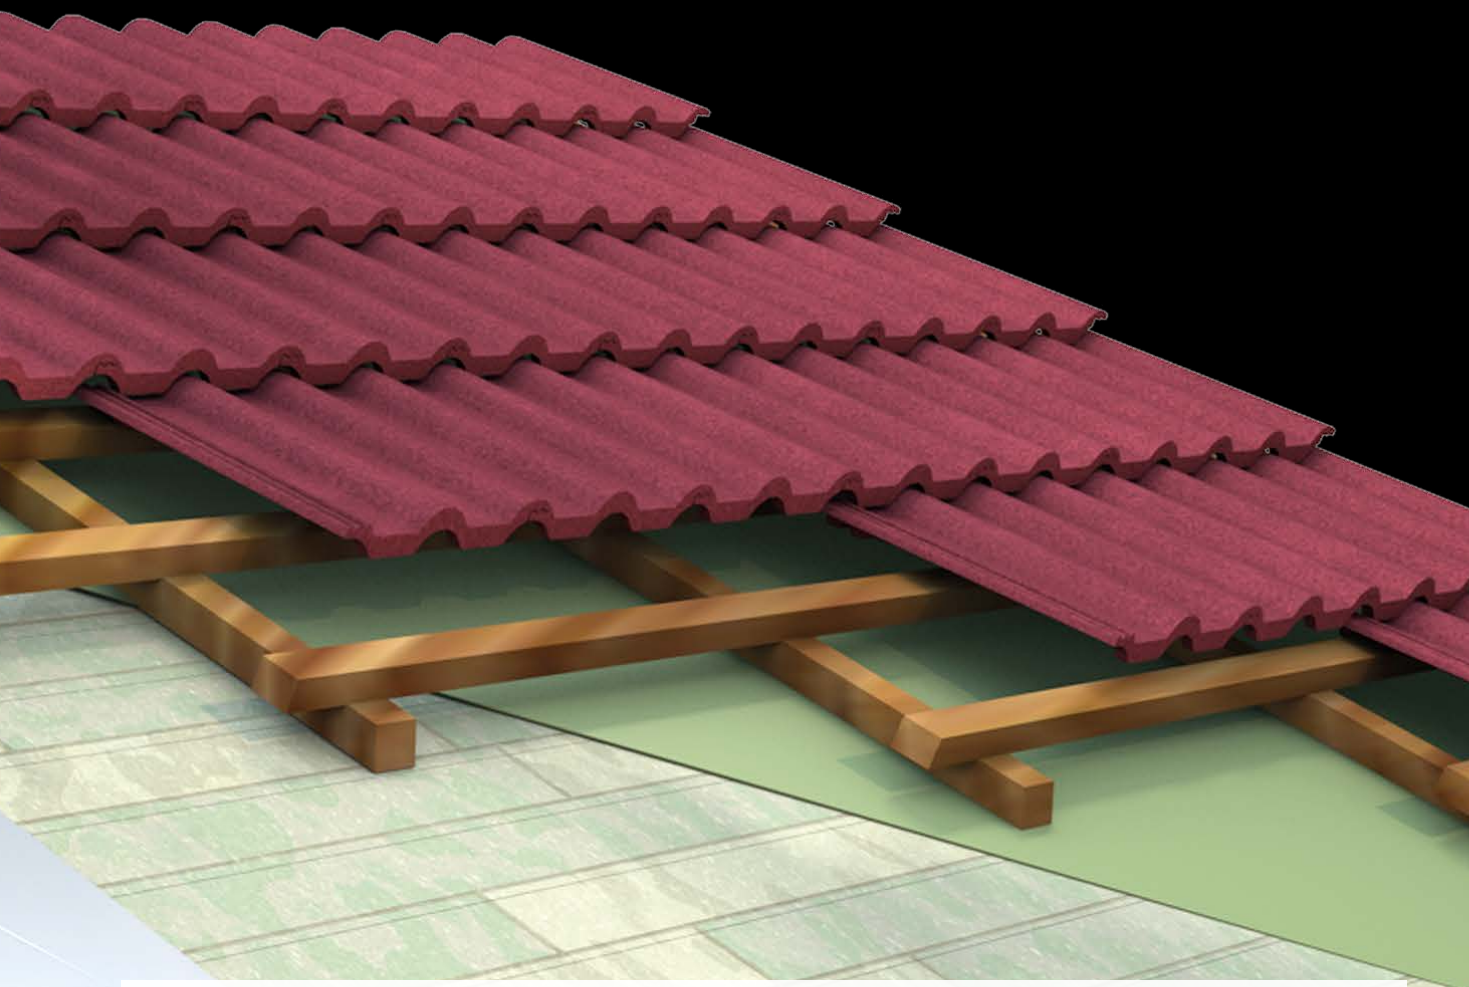

Fire Protection

Il sistema OLIflex Fire Protection è stato studiato per contribuire a debellare l'annoso problema dell'incendio dei tetti e solai in materiale combustibile che provoca ogni anno gravissimi danni a case e persone. Certificato in laboratorio secondo gli standard della norma europea EN 1856-1, sia con temperatura costante a 700°C, sia a 1000°C per 30 minuti, può essere installato a diretto contatto con solai e tetti in legno e materiale combustibile. Adatto per pacchetti isolanti con spessori fino a 200 mm di contatto diretto e ventilato. Il sistema di attraversamento tetto/solaio va sempre abbinato ad un elemento lineare OLIflex D.P. inox 25.

The OLIflex Fire Protection system was created to meet the needs of green building, efficiency and energy saving, in response to the increasingly frequent use of thick insulating materials, both in walls but above all in roofs and attics. Certificate in the laboratory according to the standards of the European standard EN 1856-1, both with a constant temperature of 700°C and at 1000°C for 30 minutes, it can be installed in direct contact with attics and roofs made of wood and combustible material. Suitable for insulation packages up to 200mm thick in direct, ventilated contact. The roof/attic crossing system must always be combined with an OLIflex D.P. inox 25 linear element.



Documentazione online
Documentation online



Fire protection

Il sistema OLIflex Fire Protection è stato studiato per contribuire a debellare l'annoso problema dell'incendio dei tetti e solai in materiale combustibile che provoca ogni anno gravissimi danni a case e persone. Testato in conformità alla UNI EN 1856/1 alla temperatura di 1000°C per 30' può essere installato a contatto con i solai o tetti in legno o materiale combustibile in genere. Il sistema di attraversamento tetto/solaio va sempre abbinato ad un elemento lineare OLIflex D.P. inox 25.

Fire protection

The OLIflex Fire Protection system has been designed for to help eradicate the long-standing problem of fire roofs and floors in combustible material that causes every year serious damage to homes and people. Tested in compliance with UNI EN 1856/1 at a temperature of 1000°C for 30' it can be installed in contact with the floors or roofs in wood or combustible material in general. The system of roof/ceiling crossing must always be combined with one linear element OLIflex D.P. inox 25.




Dall'immagine seguente si vede l'elemento di attraversamento a perfetto contatto con il solaio inclinato, mentre l'elemento lineare in D.P. installato centralmente al manufatto, rimane ad una distanza, dalle pareti interne dell'elemento di attraversamento, di soli 10 mm.

From the following picture, you can see the crossing element perfectly in contact with the inclined attic, while the linear element in D.P. centrally installed, remains at a distance of 10 mm only from the inner parts of the crossing element.




Esempi di montaggio

Assembly examples

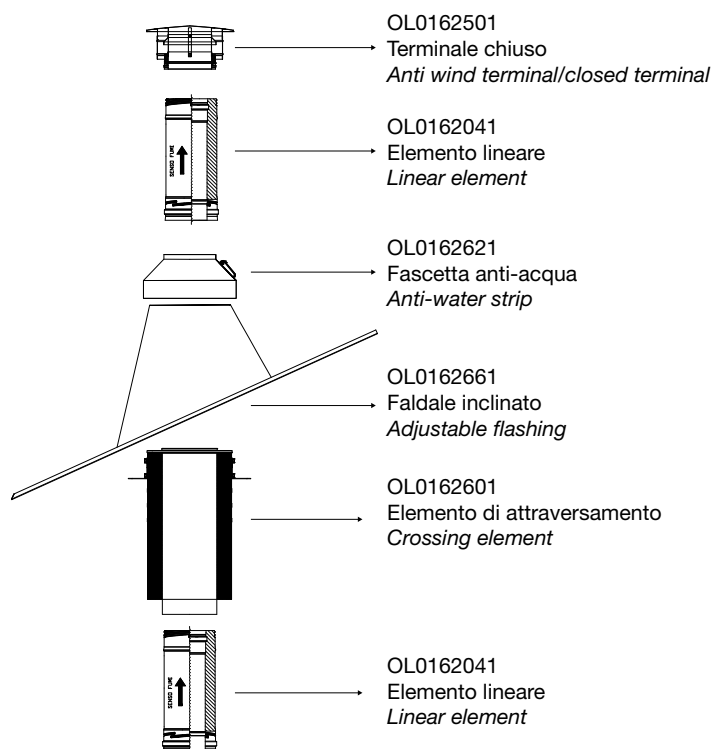


Attraversamento materiale combustibile

Passage through combustible material

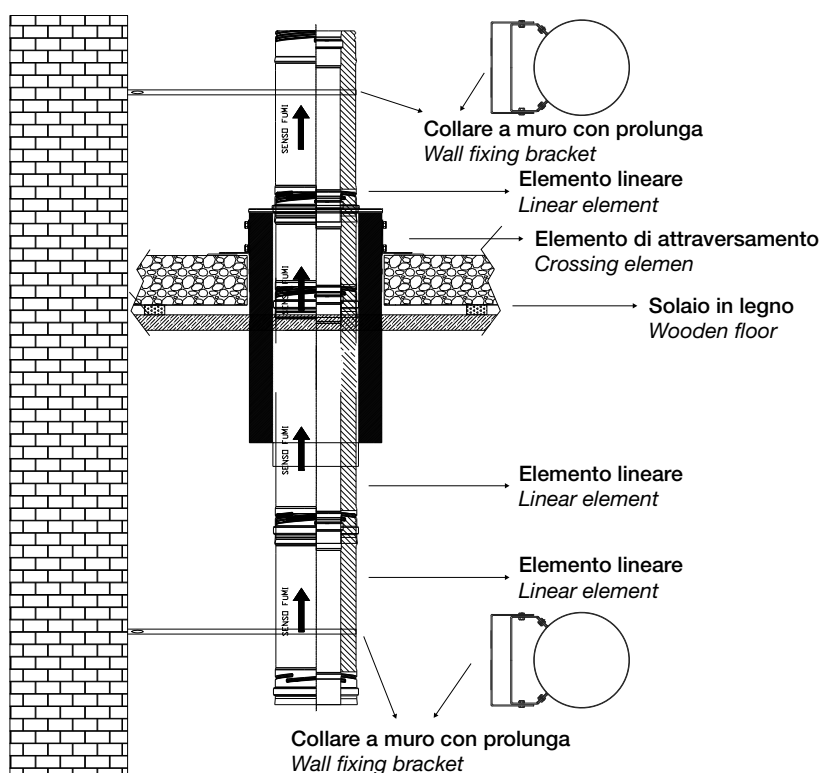


- Passaggio a tetto.
- Crossing element.

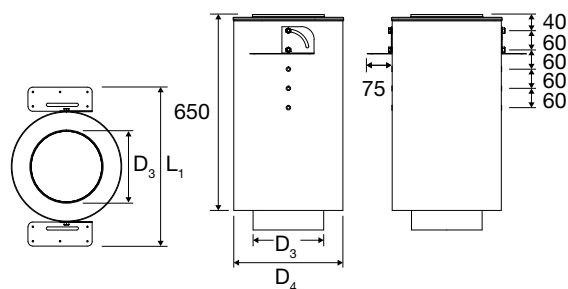


Cod.	D _{int}	D ₃	D ₄	L ₁	
OL0162601	80	150	260	410	1
OL0162602	100	170	280	430	1
OL0162603	130	200	310	460	1
OL0162604	150	220	330	480	1
OL0162605	180	250	360	510	1
OL0162606	200	270	380	530	1
OL0162607	250	320	430	580	1
OL0162608	300	370	480	630	1
OL0162609	350	420	530	680	1
OL0162610	400	470	580	730	1

- Fascia anti acqua.
- Anti-water strip for acrossing element.

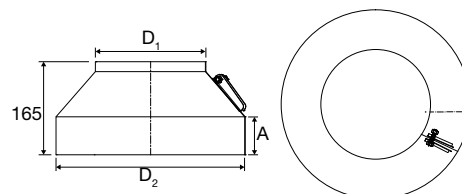


Cod.	D _{int}	D _{est}	D ₁	D ₂	A	H _{tot}	
OL0162621	80	130	130	290	60	165	1
OL0162622	100	150	150	310	60	165	1
OL0162623	130	180	180	340	60	165	1
OL0162624	150	200	200	360	60	165	1
OL0162625	180	230	230	390	60	165	1
OL0162626	200	250	250	410	60	165	1
OL0162627	250	300	300	460	60	165	1
OL0162628	300	350	350	510	60	165	1
OL0162629	350	400	400	560	60	165	1
OL0162630	400	450	450	610	60	165	1

- Faldale piano.
- *Flat flashing.*



Cod.	D _{int}	D _{est}	C	A-B	H	
OL0162641	80	130	280	740	150	1
OL0162642	100	150	300	750	150	1
OL0162643	130	180	330	790	150	1
OL0162644	150	200	350	810	150	1
OL0162645	180	230	380	840	150	1
OL0162646	200	250	400	860	150	1
OL0162647	250	300	450	910	150	1
OL0162648	300	350	500	960	150	1
OL0162649	350	400	550	1010	150	1
OL0162650	400	450	600	1060	150	1

- Faldale 5°/30°.
- *5°/30° flashing.*



Cod.	D _{int}	D _{est}	C	A-B	H	
OL0162661	80	130	280	740	150	1
OL0162662	100	150	300	750	150	1
OL0162663	130	180	330	790	150	1
OL0162664	150	200	350	810	150	1
OL0162665	180	230	380	840	150	1
OL0162666	200	250	400	860	150	1
OL0162667	250	300	450	910	150	1
OL0162668	300	350	500	960	150	1
OL0162669	350	400	550	1010	150	1
OL0162670	400	450	600	1060	150	1