


Technical Sheet

OLI80 Seawater Sanitarblock Seawater

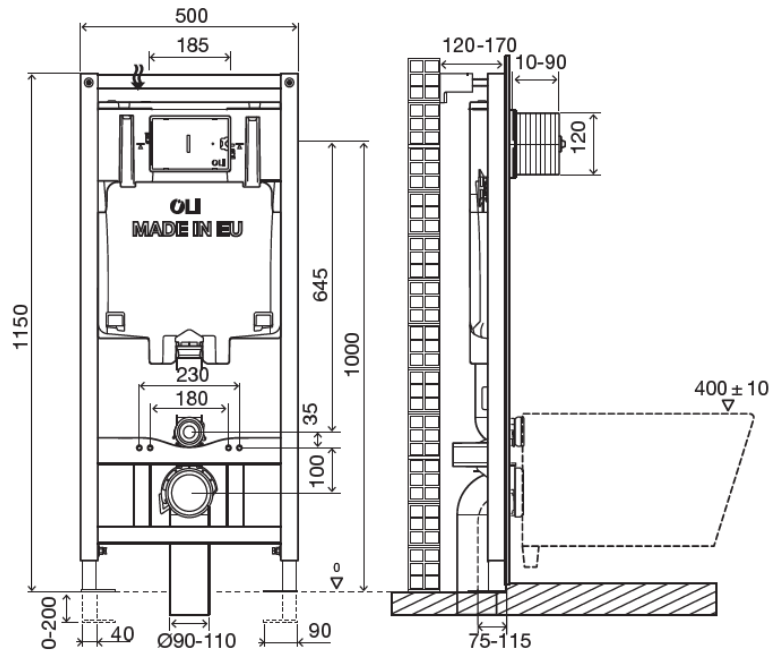

Product Identification

883252

- OLI80 Seawater Mechanic Sanitarblock

Definition and Application

- Flushing cistern to be installed inside the wall and used in combination with wall-hung standing sanitary applications.
- Compatible with wall-hung wc toilets.
- Mechanic control plate compatible with OLI80 Mechanic.
- Flushing cistern without any metal components, prepared to be used with seawater and prevent a risk of corrosion

Technical Features

Cistern

- Dual flush of 6/3 in-wall cistern compatible with either dual or single flush actuators
- Adjustable flush volumes to 4.5/3L
- 80mm thickness
- Mechanic actuation
- Working pressure from 0,1 to 16 bar
- Resistance to atmospheric humidity (Hr <90%).
- Polypropylene (PP) cistern highly resistant and inalterable to thermal stress
- Other versions compliant with: DIN/BELGAQUA standards
- EN 14055 marking CE marking
- Silent Valve Class 1 NF certified
- Supplied with anti-condensation lining

Millimetres measures

Technical Sheet

OLI80 Seawater Sanitarblock Seawater



Structure

- Painted frame with 1,5mm thickness, corrosion resistant
- Easy and quick installation with Fast Fit system
- Minimum thickness of 120mm and adjustable up to 170mm
- Height regulation of the adjustable floor brackets (0-200 mm);
- Depth adjustable outlet bend
- One-man assembly
- Frame tested for 400kg load

Accessories

- 1 Discharge pipe $\varnothing$ 56 x 360mm
- 1 Seal for discharge pipe $\varnothing$ 40/45
- 1 protective box
- 1 G 1/2" plastic stop valve
- 1 protection sponge for the stop valve
- 1 WC connection pipe $\varnothing$ 45

Warranty

- For the terms of warranty please visit www.oli-world.com

Observations

- There are available similar products. For more information please consult our Sanitary Installation Systems catalogue or our site www.oli-world.com