
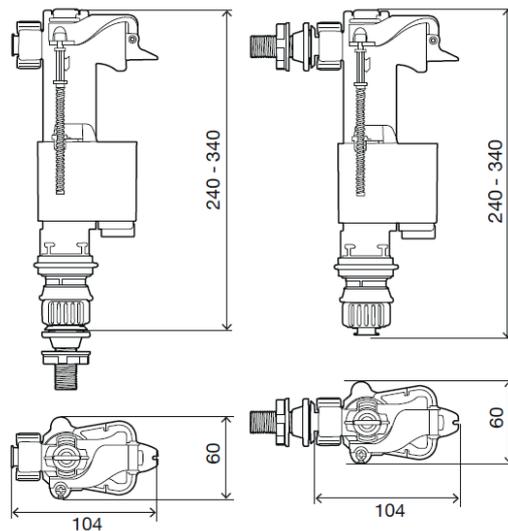


Technical Sheet

IVC100 PLUS

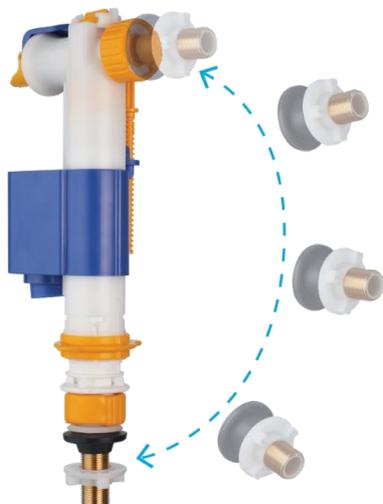

Product Identification

883706

883818

- IVC100 PLUS 3/8" brass - box
- IVC100 PLUS 3/8" brass - bag

Definition and Application

- Delayed refilling side or bottom inlet valve for ceramic cisterns with 3/8" connection

Technical Features


Inlet Valve

- Delayed refilling (it starts after outlet valve is in closed position)
- Side or bottom connection in the same inlet valve
- Reduced dimensions
- Adjustable height in the bottom connection
- Silent valve
- Easy maintenance
- Counter pressure system
- Integrated filter without having to disconnect from the water network

Hydraulic operating properties

- Dynamic Pressure: 0.1 – 10 bar
- Static pressure: 16 bar

Milimeters measures

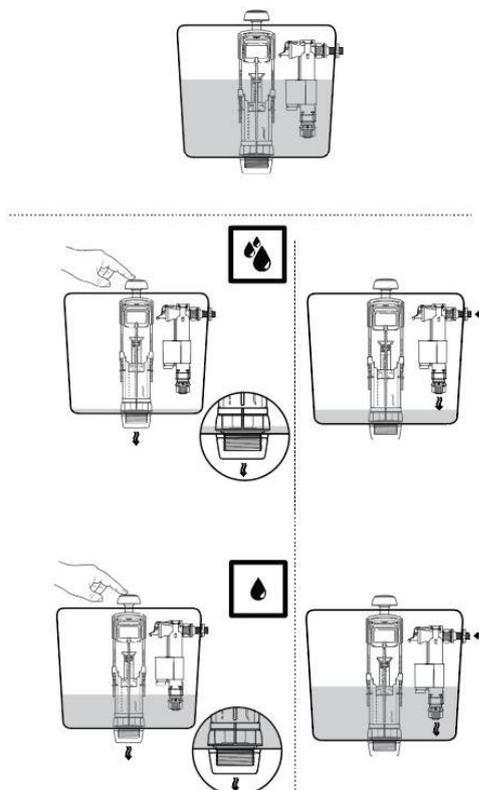

The IVC100 PLUS inlet valve, with his delayed opening system, only opens after the flush valve close. This system allows a water saving up to 0.5 liters in average in each full flush, resulting in a daily average saving of 9 liters

Warranty

Ten (10) years warranty according to the general selling terms, starting from the purchase date of the product.

If the product is not correctly installed the warranty is not valid

Observations

There are available similar products. For more information please consult our Sanitary Installation Systems catalogue or our site www.oli-world.com